

Crew Cab w/19'8" Platform, Articulating Crane, Hyrail, Tool Circuits

EACH UNIT IS BUILT TO YOUR EXACT SPECS WITH THIS BEING USED AS A GUIDE

CHASSIS SPECIFICATIONS


Exterior Color: White
Diesel Engine
Engine Brake
Tachometer
Engine Hour Meter
Manual Transmission - 10 Speed
2 Speed Reverse
Air Conditioning
AM/FM Radio
Intermittent Wipers
Mirrors - Senior West Coast
8" Convex Spot Mirrors
Vertical Exhaust Pipe with Turnout
Air Brakes with Heated Air Dryer
Air Suspension Seats - Five
Front Axle - 16,000 lbs.
Rear Axles - 40,000 lbs., Single Speed
240" Wheelbase - 127" Cab to Trunnion
Front Frame Extension - 12"
Clearance Lights - Roof
Dome Light
Tinted Glass
Air Horns
Cab Grab Handles
HD Batteries (3)
Tires - Steel Belted Radial

CHASSIS OPTIONS

Regular Cab (106 BBC)
Air Suspension Seat - Two
Shortens wheelbase by approx. 47"
5' Smaller Turn Radius

EQUIPMENT PACKAGE

Platform and Compartments - 19'8"L x 8'W
Compartments (Dimensions may vary):
Front both sides 32"W x 68"H x 26"O
Tool Storage Racks Drivers side
Oxy/Act holders Vents top & bottom Psgr side
2nd compt both sides 26"W x 26"H x 26"O
28"W x 5"H x 96"L (Long Bar Storage)
Steel floor with Rhino Lining
Rear Access Stairs and Hand Railing
Hose Reel Storage At Front of Bed - Access at Rear
Mud Guards and Flaps
Palfinger Articulated Crane - Hydraulic
Capacity -123,280 ft.lbs.: (Approximate)
9,000 lbs. @ 13' 5,300 lbs. @ 20' 2,950 lbs. @ 34'
Hydraulic Extension to 34' (approximate)
Hydraulic Planetary Winch
5,100 lbs. Maximum Capacity- Single Line
170' - 3/8" HS cable, Internal Anti-Two Block System
Primary Controls Located In Right Rear
Programmable Radio Remote Control System
Hydraulic Out and Down Stabilizers
Safety Alarms - Boom and Outrigger in Stowed Position
Lift Capacity Control and Monitoring System
Material Racks with Tie Down straps, Ratchets & Winches
Front - Permits Tilting of the Hood
Center - Integral with Bulkhead of Platform Body
Rear- Moveable with Recessed Receivers in Platform Floor
Fall Protection Lifeline System
Integral Lifeline - Driver's side
Hydraulic Tool Circuits - Dual (5 and 5 or 10 GPM Capacity)
45' Hose Set and Reel (2)
Welding Gas Hose Reel
3000 Watt - 120VAC Inverter System
Outlets at Rear and Center
Hyrail Package with Front Brakes
Hyrail Safety Accessories
Driving and Backup Lights, Wig-Wag Flashers
Grab Handles, Ladders and Steps
Pintle Hitch - 49,000 lbs. Capacity- 80,000 lbs. GCWR
Includes Trailer Air Brake Controls
Remote Battery Terminal and Jumper Cables
Amber Strobe Lights (2)
Driving and Work Lighting Systems
12VDC Truck Perimeter Lighting System
Backup Alarm, Decals and Safety Kit
Reflective Safety Striping

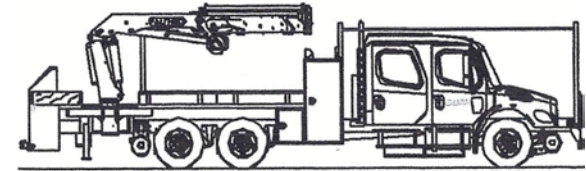

EQUIPMENT OPTIONS

Hydraulic System - Cold Weather Accessories
Boom Tip Hydraulic Functions
For tool circuit or crane attachment use
Steel Manbasket and Under Bridge Extender
Pneumatic Tool Circuit -125 CFM @100 PSI
(ILO Hydraulic Tool Circuits)
Larger or smaller Cranes available

PAYLOAD ESTIMATES

GVWR - 56,000 lbs.
GAWR's 16,000 lbs.i 40,000 lbs.